

PROVATA® Implants Product Catalogue





Southern Implants is a leading provider of unique and innovative dental implant products with a focus on top-end professional users who want more choices. Southern's expertise in research, development and manufacturing of dental implants allows us to provide Innovative Treatment Solutions that will reduce treatment times and improve patient outcomes.

Striving for excellence and meeting customer needs, has led to our wide product range characterized by Unique and Innovative products which include;

- Multiple interfaces, to suit customer preference.
- INVERTA® implant, featuring a body-shift design, engineered for primary stability and suitable for immediate loading.
- Co-Axis®, sub-crestal angle correcting implant, available in angulations of 12, 24 & 36° and various internal and external connections.
- MAX implant, specifically designed for immediate molar tooth replacement.
- The ZYGAN and ZYGEX implants for severely resorbed maxilla and craniofacial reconstruction.

Our product portfolio is in synchronized evolution with protocol improvements and technological advances.

 $My \, since re\, thanks\, to\, all\, special ists, dentists\, and\, technicians\, who\, put\, their\, trust\, in\, our\, company.$

Graham Blackbeard
Managing Director, Southern Implants

CONTENTS

| PROVATA® | |
|---|--------------------|
| Ø4.0mm / Ø5.0mm Implants (Tapered) Implants & Surgical Components | Page 06 |
| Prosthetic Flowchart | |
| Site Preparation Sequence & Instrumentation | |
| PROVATA CO-AXIS® | |
| Ø4.0mm / Ø5.0mm Implants (Tapered) | _ |
| Implants & Surgical Components | 0 |
| Prosthetic Flowchart | |
| PROMAX | |
| Ø6.0mm Implants (Tapered) | |
| Implants & Surgical Components. | Page 14 |
| Prosthetic Flowchart | Page 15 Page 16 |
| Site Preparation Sequence & Instrumentation. | Page 16 |
| Ø7.0mm / Ø8.0mm / Ø9.0mm Implants (Tapered) | |
| Implants & Surgical Components Prosthetic Flowchart | Page 18 Page 19 |
| Site Preparation Sequence & Instrumentation. | |
| Platform Matched Prosthetics (for Ø5mm and Ø6mm implants) | Page 22 |
| Prosthetic Flowchart | |
| Drill Information. | Page 24 |
| Insertion Tool Depth Markings. | Page 24 |
| Driver Information. | Page 25 |
| Instrument Trays | |
| I-HEX-EG. | Page 26 |
| I-MAX-EG. | |
| I-PROS-EG. | Page 30 |
| Insertion Tool Protocol | Page 31 |
| Co-Axis® Fixture Mount Removal Protocol | Page 31 |
| MSc Implants Description | Page 31 |
| Implant Information | Page 32 |
| Torque Table for Southern Screws | Page 34 |
| Explanation of Symbols. | Page 35 |
| | |

NOTE: • Images are for illustration purposes only and do not necessarily accurately represent the product.

• All dimensions in this catalogue are in mm, unless otherwise specified.

Not all products are cleared for sale in all countries.

PROVATA®

Ø4.0mm / Ø5.0mm











Implants are available in lengths of:

NOTE: Implant dimensions and information - page 32


| ITEM CODE TAPERED | MSc-TAPERED | IMPLANT LENGTHS (in m |
|----------------------|-------------|-----------------------|
| PRO408 | MSc-PRO408 | 8.5 |
| PRO410 | MSc-PRO410 | 10 |
| PRO411 | MSc-PRO411 | 11.5 |
| PRO413 | MSc-PRO413 | 13 |
| PRO415 | MSc-PRO415 | 15 |
| PRO418 | MSc-PRO418 | 18 |

| ITEM CODE TAPERED | MSc-TAPERED | IMPLANT LENGTHS (in m |
|----------------------|-------------|-----------------------|
| IAPERED | WSC-TAPERED | INPLANT LENGTHS (in m |
| PRO508 | MSc-PRO508 | 8.5 |
| PRO510 | MSc-PRO510 | 10 |
| PRO511 | MSc-PRO511 | 11.5 |
| PRO513 | MSc-PRO513 | 13 |
| PRO515 | MSc-PRO515 | 15 |
| PRO518 | MSc-PRO518 | 18 |

Surgical Components




Prosthetic Flowchart

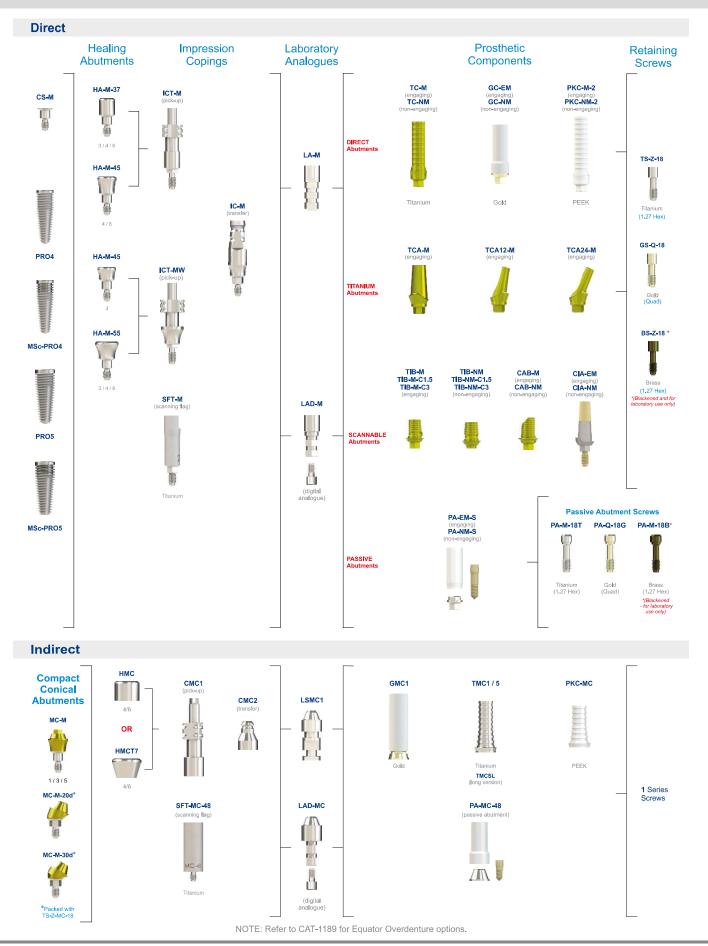


Site Preparation Sequence

Ø4.0mm Tapered (PRO4 / MSc-PRO4)

(illustrations are for 13mm implants)

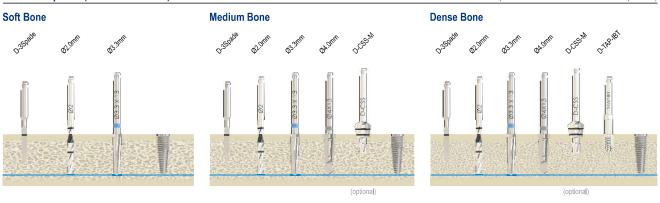


Ø5.0mm Tapered (PRO5 / MSc-PRO5)

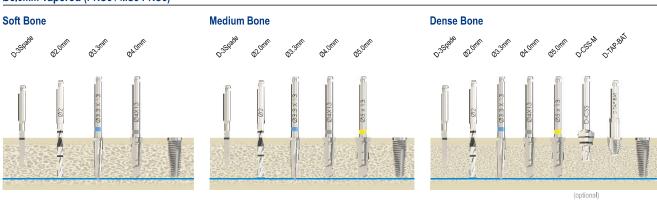

Site preparation sequence recommended by Southern Implants does not replace the judgement and experience of the surgeon.

Instrumentation

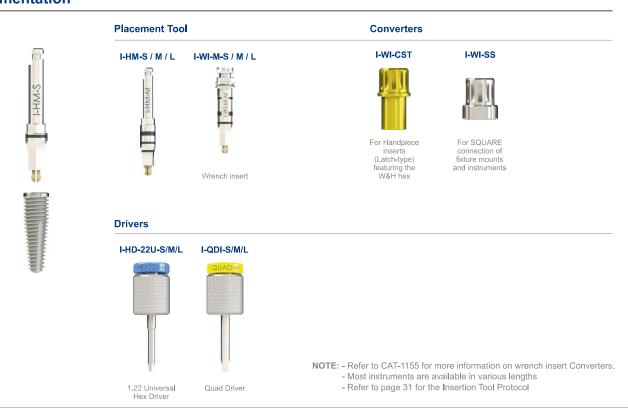

PROVATA® Co-Axis®

Ø4.0mm / Ø5.0mm











PRO12D5

MSc-PRO12D5

Implants are pre-mounted and available in lengths of:

NOTE: Implant dimensions and information - page 32


| ITEM CODE | | IMPLANT LE | NGTHS (in mm) |
|-----------|---------------|------------|---------------|
| TAPERED | MSc-TAPERED | L1 | L2 |
| PRO12D408 | MSc-PRO12D408 | 8.5 | 8.8 |
| PRO12D410 | MSc-PRO12D410 | 10 | 10.3 |
| PRO12D411 | MSc-PRO12D411 | 11.5 | 11.8 |
| PRO12D413 | MSc-PRO12D413 | 13 | 13.3 |
| PRO12D415 | MSc-PRO12D415 | 15 | 15.3 |
| PRO12D418 | MSc-PRO12D418 | 18 | 18.3 |

| ITEM CODE | | IMPLANT LE | NGTHS (in mm) |
|-----------|---------------|------------|---------------|
| TAPERED | MSc-TAPERED | L1 | L2 |
| PRO12D508 | MSc-PRO12D508 | 8.5 | 8.8 |
| PRO12D510 | MSc-PRO12D510 | 10 | 10.3 |
| PRO12D511 | MSc-PRO12D511 | 11.5 | 11.8 |
| PRO12D513 | MSc-PRO12D513 | 13 | 13.3 |
| PRO12D515 | MSc-PRO12D515 | 15 | 15.3 |
| PRO12D518 | MSc-PRO12D518 | 18 | 18.3 |

Surgical Components




Prosthetic Flowchart

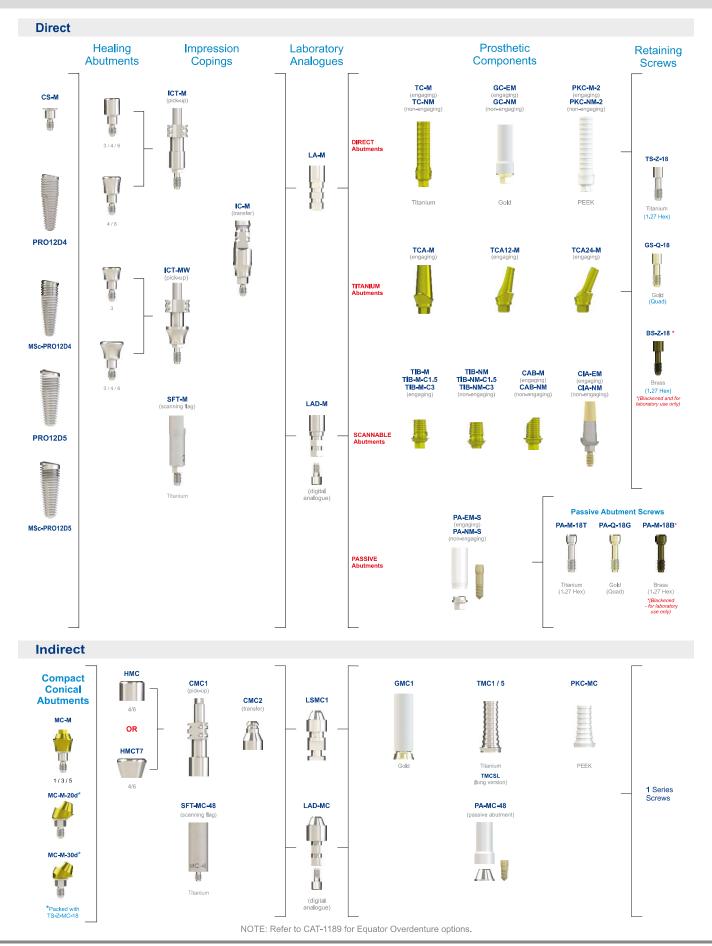


Site Preparation Sequence

Ø4.0mm Tapered Co-Axis® (PRO12D4 / MSc-PRO12D4)

(illustrations are for 13mm implants)

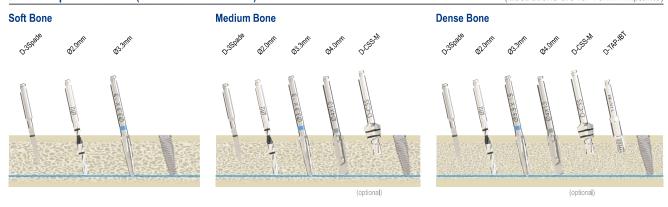


Ø5.0mm Tapered Co-Axis (PRO12D5 / MSc-PRO12D5)

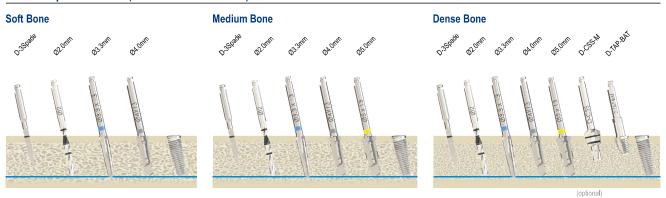

Site preparation sequence recommended by Southern Implants does not replace the judgement and experience of the surgeon.

Instrumentation

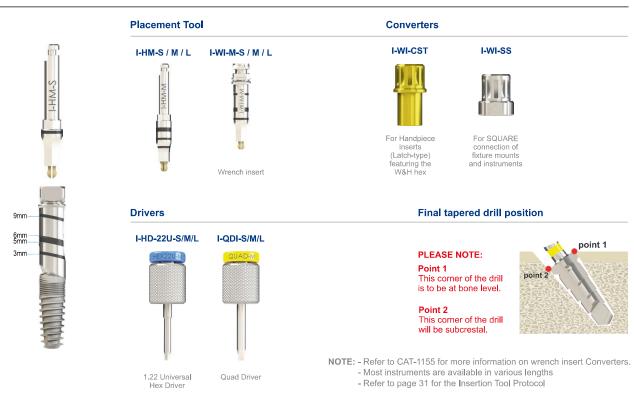

PROMAX

Ø6.0mm

(Standard Interface)



PROMAX6

Implants are available in lengths of:


NOTE: Implant dimensions and information - page 32

| TAPERED | IMPLANT LENGTHS (in mm) |
|-----------|-------------------------|
| PROMAX607 | 7 |
| PROMAX609 | 9 |
| PROMAX611 | 11 |

Surgical Components


| Cover Screw | Healing Abut | ments | | |
|-------------|---------------|---------------|---------------|--|
| CS-M | HA-M-37 | HA-M-45 | HA-M-55 | |
| | Ø3.7 | Ø4.5 | Ø5.5 | |
| | 3/4/6 lengths | 3/4/6 lengths | 3/4/6 lengths | |

Prosthetic Flowchart

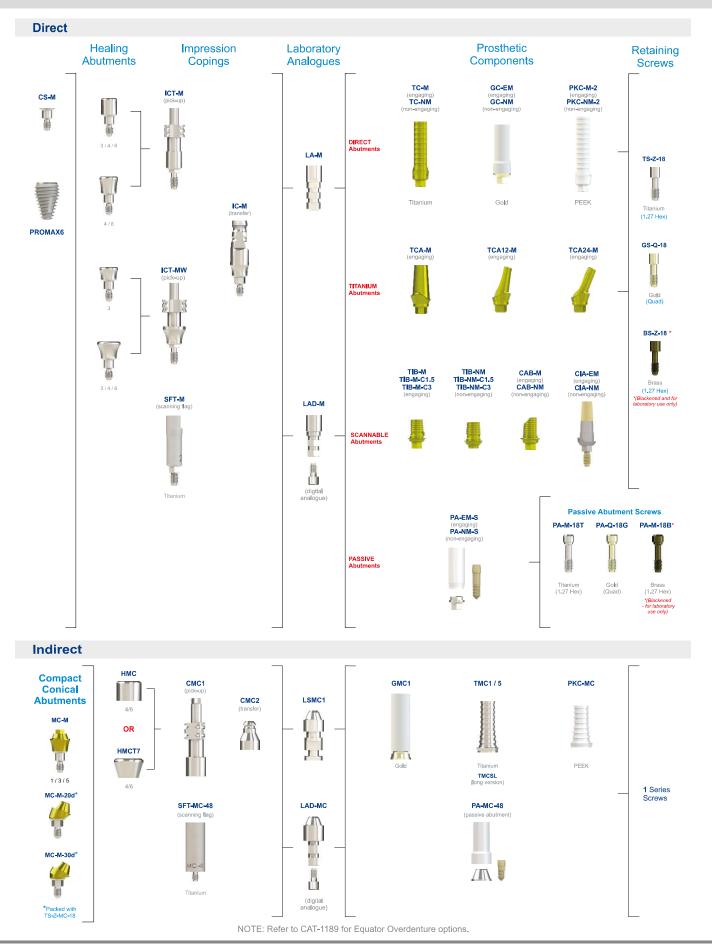

Ø6.0mm Tapered (PROMAX6)

(illustration is for 9mm implants)

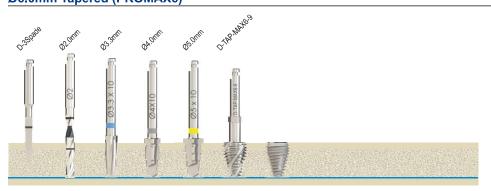

Site preparation sequence recommended by Southern Implants does not replace the judgement and experience of the surgeon.

Instrumentation



I-HM-S / M / L

Placement Tool





Converters

For Handpiece inserts (Latch-type) featuring the W&H hex

I-WI-SS



For SQUARE connection of fixture mounts and instruments

Drivers



NOTE: - Refer to CAT-1155 for more information on wrench insert Converters.

- Most instruments are available in various lengths
- Refer to page 31 for the Insertion Tool Protocol

PROMAX

Ø7.0mm / Ø8.0mm / Ø9.0mm

(Wide Interface)







PROMAX7

PROMAX8

PROMAX9

Implants are available in lengths of:

| ITEM CODE TAPERED | IMPLANT LENGTHS (in mm) |
|----------------------|-------------------------|
| PROMAX807 | 7 |
| PROMAX809 | 9 |
| PROMAX811 | 11 |


| ITEM CODE TAPERED | IMPLANT LENGTHS (in mm) |
|----------------------|-------------------------|
| PROMAX907 | 7 |
| PROMAX909 | 9 |
| PROMAX911 | 11 |

NOTE: Implant dimensions and information - page 32

Surgical Components


Cover Screw Healing Abutments CS-Z HA-Z6 Ø6.0 Ø7.8 PKA-Z6-9 PKA-Z8-11 9.0mm 11mm PEEK PEEK PEEK PEEK Peek Retaining Screw sold separately (TS-Z-18)

Prosthetic Flowchart

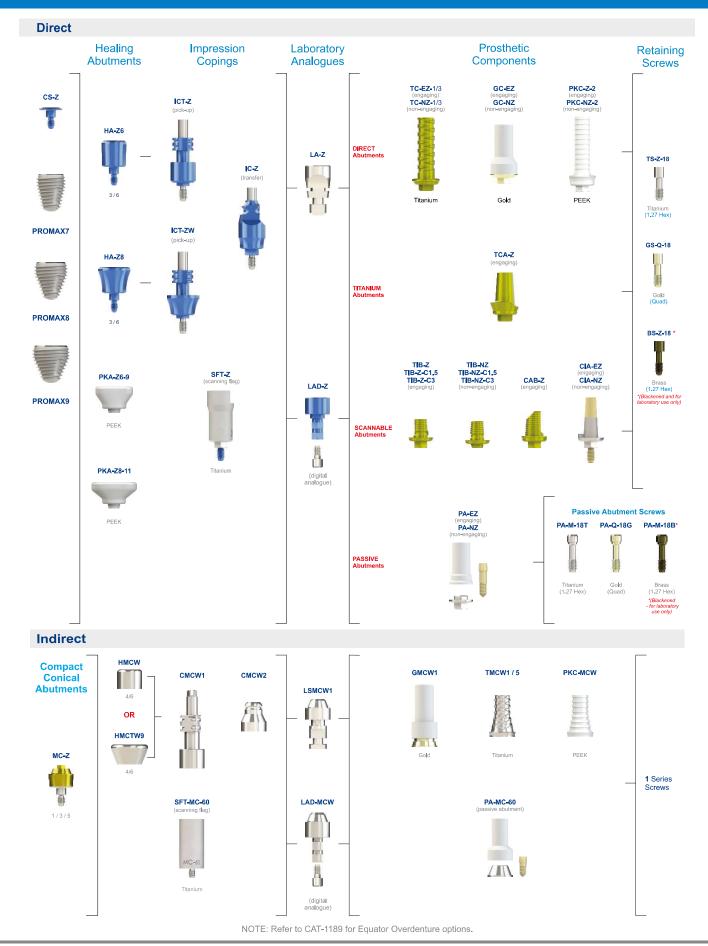


Ø7.0mm Tapered (PROMAX7)


(Illustrations are for 9mm implants)

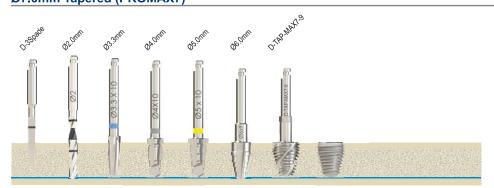

Ø8.0mm Tapered (PROMAX8)

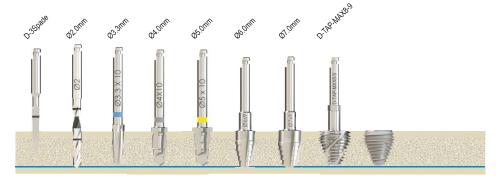

Ø9.0mm Tapered (PROMAX9)

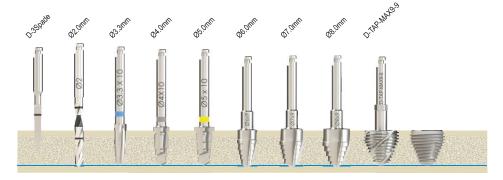

Site preparation sequence recommended by Southern Implants does not replace the judgement and experience of the surgeon.



Instrumentation





- Most instruments are available in various lengths
- Refer to page 31 for the Insertion Tool Protocol


PLATFORM MATCHED PROSTHETICS

for Ø5mm & Ø6mm implants

PLATFORM MATCHED PROSTHETICS for Ø5mm & Ø6mm implants

In applications of the PROVATA® Ø5mm and PROMAX Ø6mm implants, for single posterior teeth, where the patient is known to have a very strong bite force, the clinician may choose to follow this "Platform Matched" approach. This approach uses the maximum implant platform dimension, in order to give the single tooth prosthetics greater stability.

Warning: These Platform Matched Prosthetics are not compatible with PROVATA Ø4mm implants or PROVATA Co-Axis® implants.

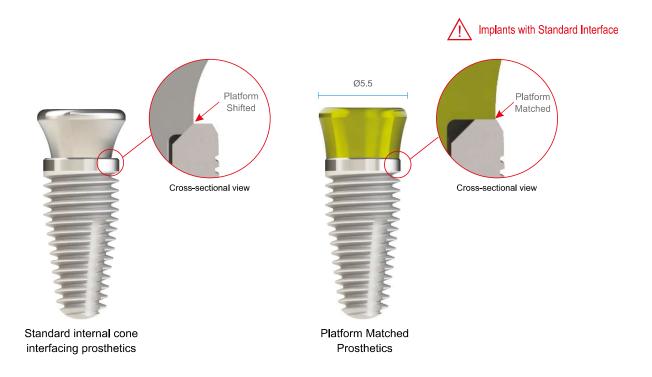


Refer to page 6 for PROVATA \emptyset 5,0mm & page 14 for PROMAX \emptyset 6,0mm implant details.


Surgical Components

| Cover Screw | Healing Abutments | |
|-------------|-------------------|--|
| CS-M | HA-M-P45 | |
| | Ø4.5 | |
| | 3/4/6 lengths | |

Prosthetic Flowchart

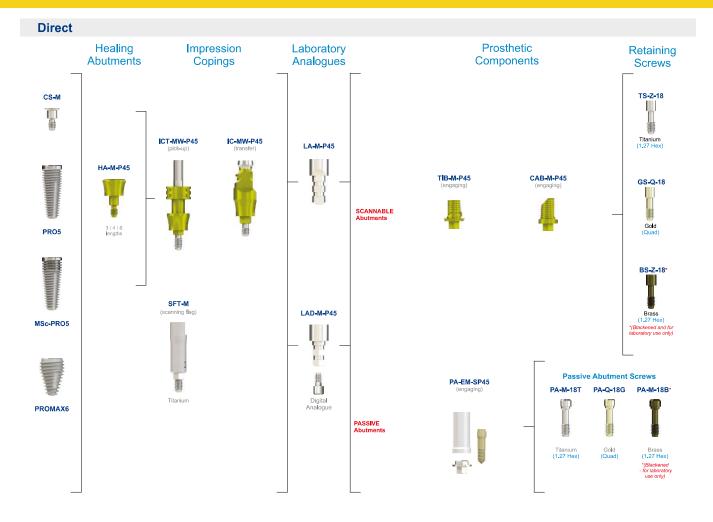


Twist Drill Markings





INSERTION TOOL DEPTH MARKINGS

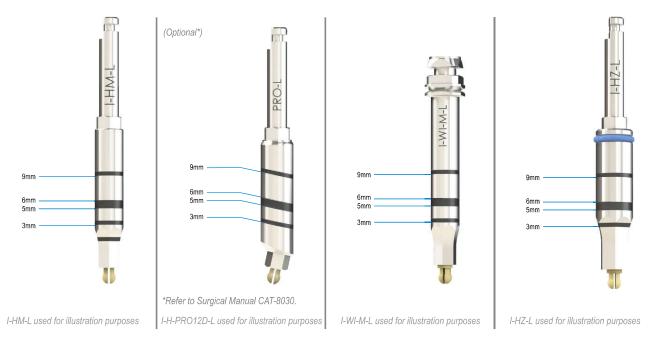

NOTE: • Laser markings at 3mm, 5mm, 6mm and 9mm from implant platform.

• Refer to CAT-1201 for Insertion Tool markings and depths.

Important: The PEEK bits (I-PBIT-L18) should be replaced on a regular basis. General wear & tear are to be expected with regular use. Items sold separately.

Drivers



Abutment Drivers (for Compact Conical Abutments)





Driver Information for 1 Series Screws



Refer to CAT-1203 for alternative Drivers

I-HEX-EG for surgical placement of PROVATA® Implants

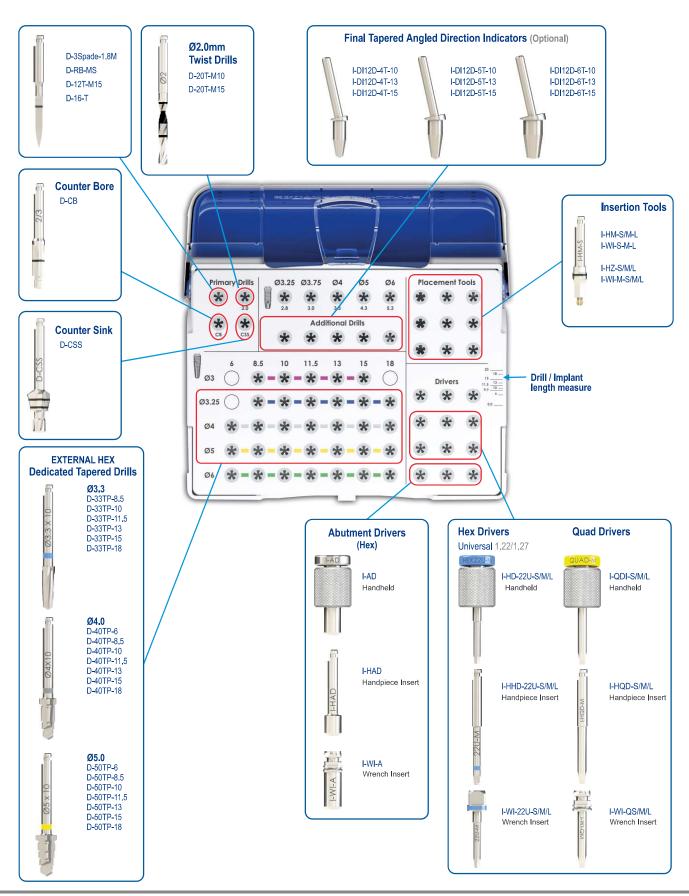


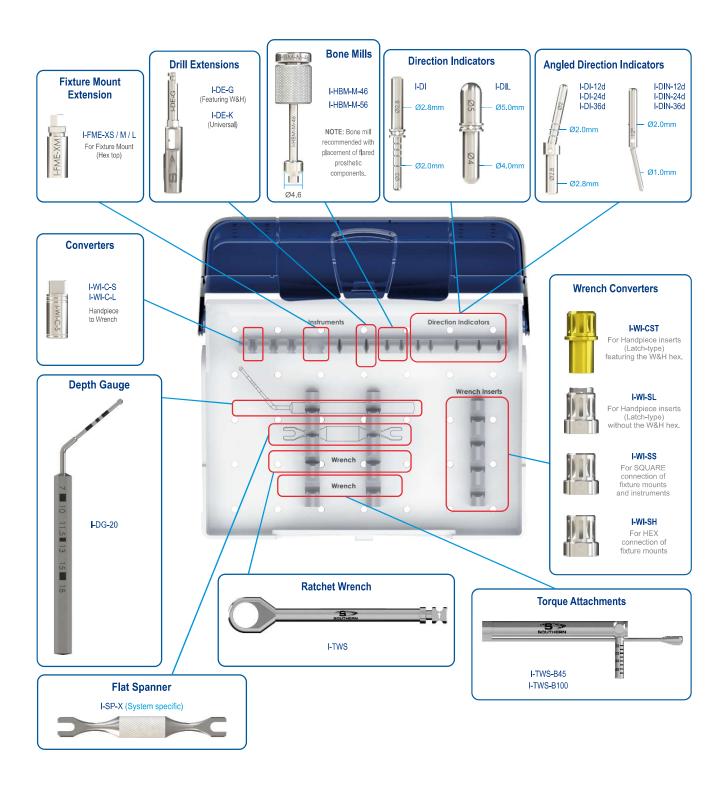


NOTE:

- The surgical kit has an intuitive layout to guide the surgeon through the drill sequence.
- · Most Instruments available in various lengths.
- All instruments and tooling used during the procedure must be maintained in good condition, and cleaned and sterilized prior to to use. Please consult the Southern Implants Cleaning and Sterilization Procedure Guidelines (CAT-1039) for guidance concerning the maintenance of drills, instruments, and surgical trays.

I-MAX-EG for surgical placement of PROMAX Implants

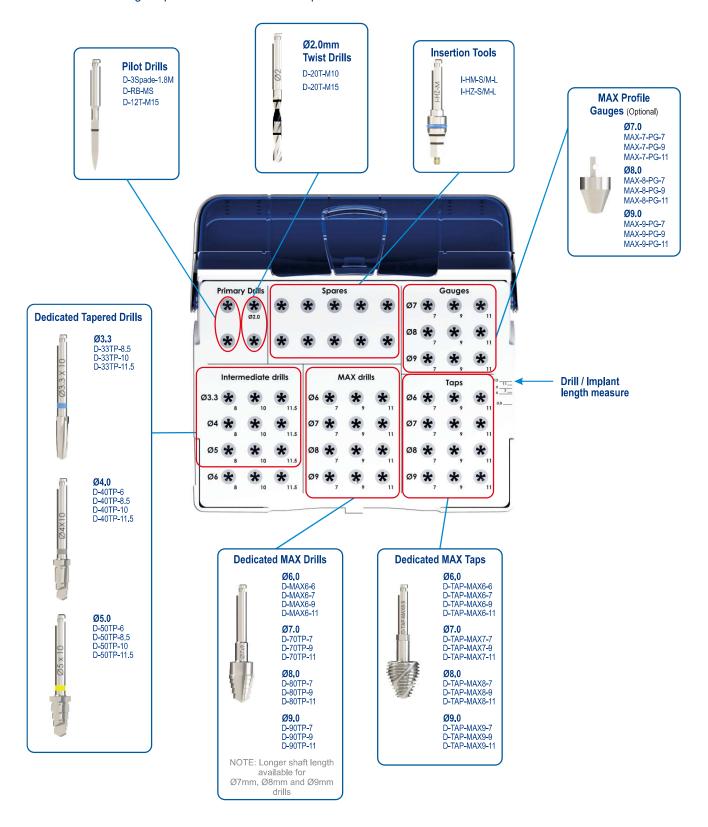


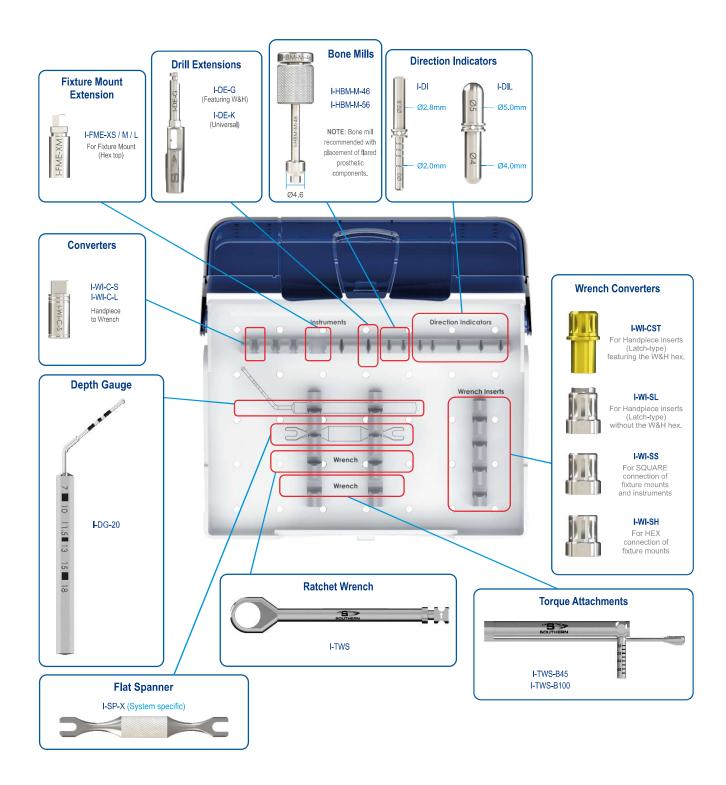

NOTE:

- The surgical kit has an intuitive layout to guide the surgeon through the drill sequence.
- Most Instruments available in various lengths.
- Profile Gauges available for Ø7.0mm, Ø8.0mm & Ø9.0mm implants only.
- All instruments and tooling used during the procedure must be maintained in good condition, and cleaned and sterilized prior to to use. Please consult the Southern Implants Cleaning and Sterilization Procedure Guidelines (CAT-1039) for guidance concerning the maintenance of drills, instruments, and surgical trays.

I-PROS-EG Prosthetic Instrument Tray

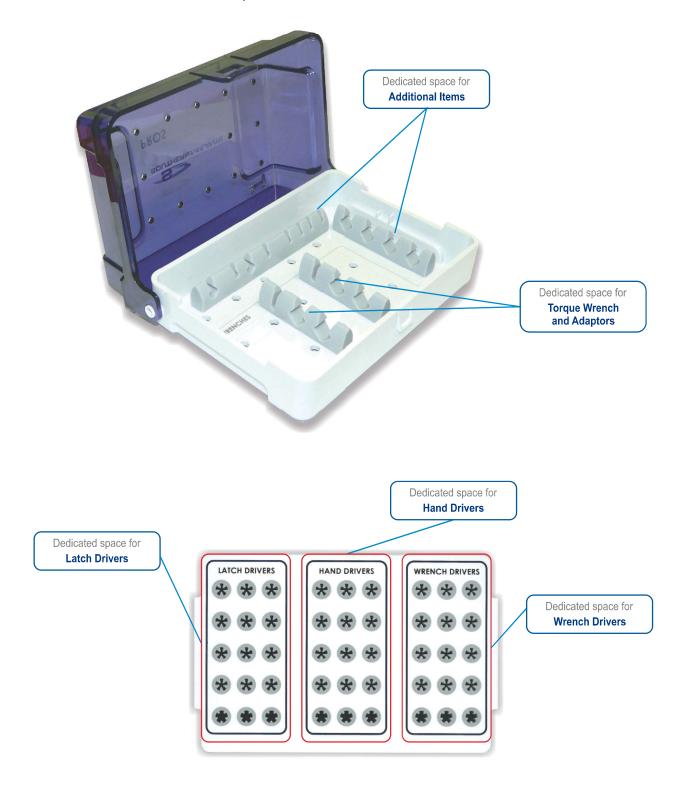

NOTE:

- · This instrument tray is to be customised by the user to be suitable for use with the preferred implant system and its surgical or prosthetic items.
- Most Instruments available in various lengths.

Implant Placement Procedure for PROVATA® & PROMAX

- The tools I-HM-S / M / L (standard interface) and I-HZ-M / L (wide interface) are used to pick up the implant from the packaging.
- 2. The hexagon of the insertion tool in the implant must be fully engaged before torque is applied, to prevent any damage [The hexagon is fully engaged when the straight portion of the hexagon tool is almost completely sunken in the implant (fia.1)].
- 3. The implant is placed in the prepared site and screwed in with a motor unit at 15rpm while applying downwards pressure.



CO-AXIS® FIXTURE MOUNT REMOVAL PROTOCOL

- 1. The tool I-HM-S / M / L is used to pick up the implant from the packaging (fig. 1) after attaching it to the fixture mount.
- Once the implant is placed and the position verified, after final X-rays have been taken, remove the fixture mount by unscrewing the fixture mount screw using a I-HD-22U-S / M / L handheld driver (fig. 2).






MSc IMPLANTS DESCRIPTION

MSc stands for Machined Surface coronally.

Capturing the advantage of Southern's proven rough surface where it is needed most. The "smoother" coronal machined surface is engineered to reduce bacterial adhesion and thus, decrease the risk of infection which could lead to marginal bone loss.

Indicated for patients with higher risk of coronal bone loss (smokers, history of periodontitis, cardio-vascular disease)


The coronal machined surface area covers the top crestal 3mm of the implant.




| | | | | | | | | | | | IMPL | ANT | IMPLANT LENGTH CODES | S ∓ | DES | |
|--------------------|-------|---------------------------------|------------------------|-------------|--------------------------------|--------|--------|------------------|----------------------------------|-------------------|------|-----|----------------------|-----|-----|----|
| | MAJOR | IMPLANT PLATFORM DIAMETER | PROSTHETIC DIAMETER | Prosthetics | HEX WIDTH (across flats) | COLLAR | THREAD | APEX DIAMETER | Cylindrical or Tapered C/T | PLATFORM ANGLE | ∞ | 9 | E | 5 | 15 | 85 |
| PRO4 Ø4.0mm | 4.07 | 3.87 | 3.6 | | 2,44 | 9.0 | 9.0 | 2.6 | _ | | > | > | > | > | > | > |
| MSc-PRO4 Ø4.0mm | 4.07 | 3,87 | 3.6 | | 2,44 | 9:0 | 9.0 | 2.6 | - | | > | > | > | 7 | > | > |
| PRO5 Ø5.0mm | 4.70 | 4.5 | 3.6 / 4.5 | 1 | 2,44 | 9.0 | 9.0 | 3.13 | _ | | > | > | > | > | ~ | > |
| MSc-PRO5 Ø5.0mm | 4.70 | 4.5 | 36/45 | | 2.44 | 9'0 | 9.0 | 3.13 | | | > | ^ | ^ | 7 | ^ | 7 |
| PRO12D4 Ø4.0mm | 4.07 | 3.75 | 3.6 | | 2.44 | 9'0 | 9.0 | 2.6 | 1 | 12° | > | > | ^ | 1 | > | 7 |
| MSc-PR012D4 Ø4.0mm | 4.07 | 3.75 | 3.6 | | 2.44 | 9.0 | 9.0 | 2.6 | | 12° | ^ | ^ | ^ | ^ | ^ | > |
| PRO12D5 Ø5.0mm | 4.70 | 3.75 | 3.6 | | 2.44 | 9.0 | 9.0 | 3.13 | _ | 12° | 7 | ~ | ~ | > | ~ | > |
| MSc-PRO12D5 Ø5.0mm | 4.70 | 3,75 | 3.6 | | 2.44 | 9'0 | 9.0 | 3,13 | T | 12° | ^ | ^ | ^ | 7 | ^ | > |
| | | | | | | | | | | | 7 | 6 | 11 | | | |
| PROMAX6 Ø6.0mm | 0.9 | 4.5 | 3.6 / 4.5 | | 2.44 | 0,25 | 8.0 | 3.0 | T | | ^ | ^ | ٨ | | | |
| PROMAX7 Ø7.0mm | 7.0 | 5.7 | 5.6 | | 3.06 | 0.15 | 0.8 | 4.44 | 1 | | ^ | ^ | > | | | |
| PROMAX8 Ø8.0mm | 8.0 | 6.5 | 5.6 | | 3,06 | 0,25 | 0.8 | 3.94 | | | 7 | ^ | ^ | | | |
| PROMAX9 Ø9.0mm | 9.0 | 7.5 | 5.6 | | 3.06 | 0.25 | 0.8 | 4 94 | ⊢ | | > | > | > | | | |

All dimensions in this catalogue are in mm, unless otherwise specified.

Not all products are cleared for sale in all countries.

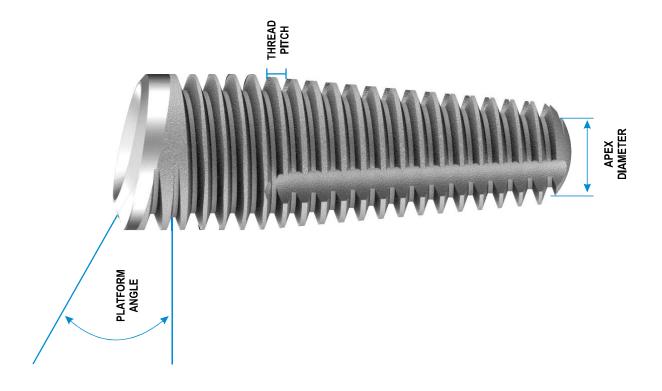

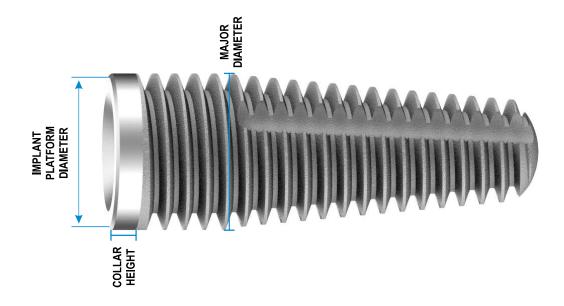

1.27 Hex Prosthetic screws

Quad Prosthetic screws









GS-Q-18

TORQUE: 32Ncm Head Diameter: 2.25mm Screw TORQUE with PEEK Prosthetics:

1.27 Hex Passive Abutment screws

Quad Passive Abutment screws



PA-M-18T







TORQUE: 32Ncm **Head Diameter:** 2.60mm

Digital Laboratory Analogue screw

TIB Abutment screw





TORQUE: Finger tighten Head Diameter: 2,40mm



TORQUE: 32-40Ncm Head Diameter: 2,40mm

NOTE: Screw supplied with all Digital Analogues

1 Series screws

M1.4



TSH1











TSU1 GSU1

TORQUE: 10-15Ncm Head Diameter: 2.25mm Screw TORQUE with PEEK Prosthetics: 10 - 15Ncm

- **NOTE:** Due to design revisions screw tips may be flat or rounded.
 - Always ensure that the correct screw is used for the relevant implant and component.
 - * Blackened and for laboratory use only.

Screw Head Connections

Hex





Unigrip



The following symbols are used on packaging labels and they indicate the following:




- 2 Colour code indicating implant interface
- 3 Implant image
- 4 Implant details and size
- 5 STERILE R Sterilization using Irradiation




- Consult instruction for use
- 2 Do not reuse
- **C E** CE mark and notified body number
- **Expiry date**
 - Sterile unless package is opened or damaged
- 6 2D Bar coding Contains the GTIN, Expiry Date and LOT Number
- 7 Patient sticker for documentation purposes (to be used by health care provider on patient file)
- f R Prescription device

CAUTION: FEDERAL LAW RESTRICTS THE DEVICE TO SALE BY OR ON THE ORDER OF A LICENCED HEALTH CARE PROVIDER.

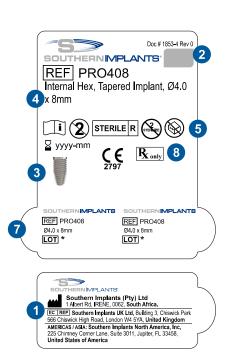



Platform Interface



Images are for illustration purposes only and do not necessarily accurately represent the product.



For more information, please contact your Southern Implants Representative or visit southernimplants.com



South Africa - Headquarters 1 Albert Road, Irene, RSA **T:** +27-12-667-1046 | **E:** info@southernimplants.com

Subsidiaries

Australia Southern Implants Australia **T:** +61-2-8076-9337

E: info@southernimplants.com.au

United Kingdom Southern Implants UK T: +44-20-8899-6845 / 6 / 7 **E:** info@southernimplants.co.uk

USA and Canada Southern Implants North America Inc. **T:** +1-561-472-0990 **E:** customercare@southernimplants.com

Southern Implants Products are distributed world-wide, please visit southernimplants.com for a list of Distributors.

©2019 Southern Implants (Pty) Ltd. All rights reserved. Co-Axis, Southern Implants, and Subcrestal Angle Correctionare registered trademarks and Body-Shiff, INVERTA and PROVATA are trademarks of Southern Implants (Pty) Ltd. Not all implants are available in all markets.